

Product data sheet

Specifications

SQUARE D



Mini circuit breaker, QO, 30A, 3 pole, 120/240VAC, 10kA, bolt on

QOB330

Product availability: Stock - Normally stocked in distribution facility

Main

Product	Miniature circuit-breaker
Range	QO
Current Rating	30 A
Voltage Rating	120/240 V AC 240 V AC 120 V AC
Mounting Type	Bolt-on
Number of Poles	3P
Circuit Breaker Type	Standard
Ratings	HACR rated
Electrical Connection	Pressure plate

Complementary

Interrupt Rating	10 kA 120/240 V AC 10 kA 240 V AC 10 kA 120 V AC
Number of Panel Spaces	3
Wire Size	AWG 14...AWG 8 copper or aluminium
Tightening Torque	35.4 lbf.in (4 N.m)
Height	3.0 in (76 mm)
Width	2.2 in (57 mm)
Depth	2.9 in (74 mm)
Net Weight	0.800 lb(US) (0.363 kg)

Environment

Certifications	UL Listed CSA
Ambient Rating	104 °F (40 °C)

Ordering and shipping details

Category	US10DE200015
Discount Schedule	0DE2
GTIN	785901417125
Returnability	Yes
Country of origin	MX

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	2.50 in (6.35 cm)
Package 1 Width	2.20 in (5.59 cm)
Package 1 Length	3.00 in (7.62 cm)
Package weight(Lbs)	13.12 oz (371.95 g)
Unit Type of Package 2	BB1
Number of Units in Package 2	3
Package 2 Height	3.300 in (8.382 cm)
Package 2 Width	2.300 in (5.842 cm)
Package 2 Length	6.900 in (17.526 cm)
Package 2 Weight	2.500 lb(US) (1.134 kg)
Unit Type of Package 3	CAR
Number of Units in Package 3	36
Package 3 Height	3.50 in (8.89 cm)
Package 3 Width	14.200 in (36.068 cm)
Package 3 Length	21.600 in (54.864 cm)
Package 3 Weight	30.801 lb(US) (13.971 kg)

Contractual warranty

Warranty (in months)	18
----------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



Environmental footprint

Total lifecycle Carbon footprint	20 kg CO2 eq.
Environmental Disclosure	Product Environmental Profile
Carbon footprint of the manufacturing phase [A1 to A3]	2 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	0 kg CO2 eq.
Carbon footprint of the installation phase [A5]	0 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	17 kg CO2 eq.
Carbon footprint of the end-of-life phase [C1 to C4]	0.1 kg CO2 eq.

Use Better



Materials and Substances

Packaging made with recycled cardboard	No
Packaging without single use plastic	Yes
SCIP Number	Af42fb01-813d-40c0-ae28-b8b3299dbc99
EU RoHS Directive	Compliant
REACH Regulation	Reference contains Substances of Very High Concern above the threshold
California proposition 65	WARNING: This product can expose you to chemicals including: Nickel (Metallic), which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov
Halogen content performance	Halogen free product

Use Longer



Lifetime extension

Repair	No
--------	----

Use Again




Repack and remanufacture

Circularity Profile	No need of specific recycling operations
Take-back	No

Technical Illustration

Dimensions

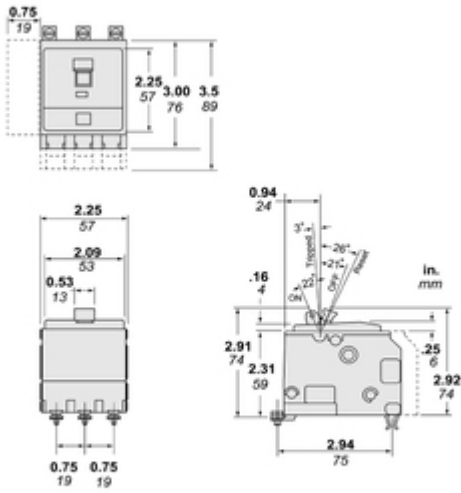

Dimensions are approximate. Refer to technical documentation for additional detail.